
SIHGA



SIHGA® Feature	YOUR Benefit
for professional installation from wood on wood	including distance of the two woods
ribs pull without pre-drilling into the wood	adjustment in horizontal and vertical direction possible
including SIHGAFIX, system pin and installation instructions	time-saving, practical, precise, all accessories are included
rated value	SIHGA® will do the calculation for you

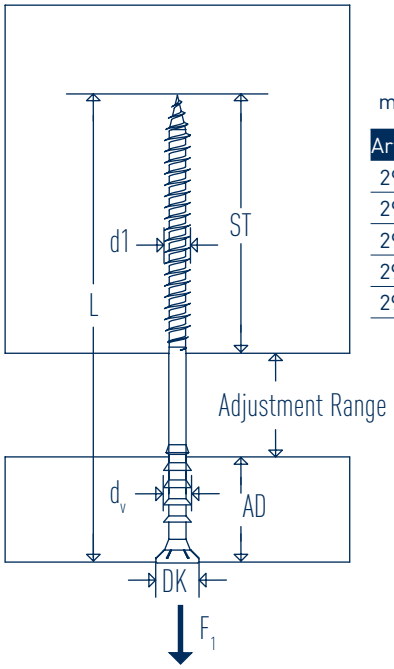

SIHGA®		Dimension	Attachment Part	Setting Depth	Adjustment Range	Recommended Loads	
montagepack		GoFix® JK	AD	ST	to	Tensile Force F_1 [kN]	
Art. No.	PU	d1 x L	[mm]	[mm]	[mm]	Head	Thread
29326	100	**6,0 x 80**	20	50	10	0,51	1,03
29336	100	**6,0 x 100**	20	50	30	0,51	1,03
29346	100	**6,0 x 120**	20	50	50	0,51	1,03
29356	100	**6,0 x 145**	20	50	75	0,51	1,03
29366	100	**6,0 x 160**	20	50	90	0,51	1,03

Dimension [mm]

GoFix® JK

d1	d_v	TX	DK
6,0	6,5	25	10,0

