TefaFix® T

SIHGA



TefaFix® T
aluminium blank

TefaFix® T
aluminium SC 9 coated


© Bonauer Bölling Architekten Berlin


SIHGA® Feature	YOUR Benefit
2-part system	with visible screw connection in offset arrangement, sliding effect also in the longitudinal direction of the substructure, screw breakage due to swelling and shrinking of the wood is a thing of the past
also available in SC 9 coated	continuous black joint optic
profile open at the bottom	prefabrication of the parts possible by screwing on the rear
lateral flange	additional fastening options
special inner geometry	many connections possible with TefaBind® connector
trapezoidal shape	perfect water drainage guaranteed
moveable	endlessly extendable in length
aluminium	durable, machinable with conventional tools and machines
TefaBind® connector	all, even angled connections possible
universally combinable	for use also optimally with SenoFix® FT* and GleitFix® GF
HFA inspected in combination with Alu-TeFix®, TefaFlex® T and TefaBind®	for details please see page 66


* Available from specialist timber dealers

SIHGA® Package		TefaFix® T Type	Surface	Length
Art. No.	PU			[mm]
52112	10	4400	bright	4400
52022	10	4400	SC 9	4400

SIHGA® objektpack®		TefaFix® T Type	Surface	Length
Art. No.	PU			[mm]
52023	15	1100	SC 9	1100

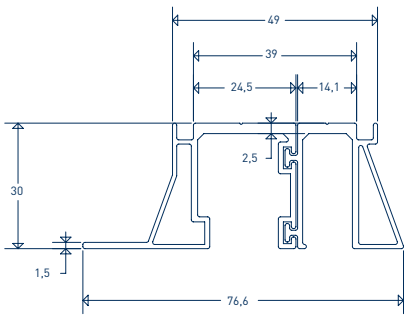

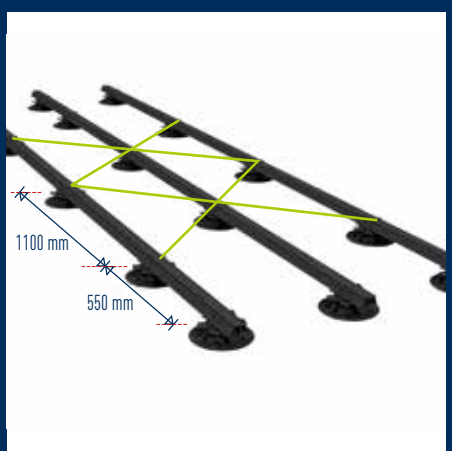

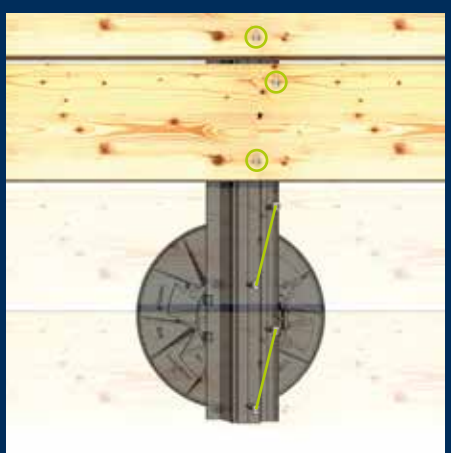

SIHGA® TIP:

For the application in combination with SenoFix® FT the TefaBind® connecting piece incl. screw connection for the longitudinal joint must be used.