
GleitFix® AE

SIHGA® Feature	YOUR Benefit
screw-fastening of start and end planks invisible	elegant look and long-lasting fastening
planks remain undamaged on all visible surfaces	timber is screwed from below, this results in a longer lifespan and prevents rot, as well as direct weathering
special compensation system compensates for the natural swelling and shrinkage of the planks	reduces the crack and break behaviour of the timber during these natural processes
optionally also with tested stainless steel system screws with drill bit in A4 (GleitFix® AE CS)	stainless steel A4 BohrFix® FB screws for increased risk of corrosion when exposed to salt and chlorine
includes SIHGAFIX® stainless steel, from hardened stainless steel BohrFix® FB with drill bit and installation instructions	no rust from external sources, screws do not shear or break; time-saving, practical, precise, all accessories are enclosed




BohrFix® FB
∅ 4,2 x 17/22/28

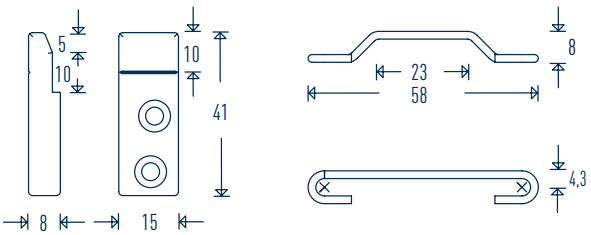

SIHGA® montagepack Art. No.	PU	Dimension GleitFix® AE Type	Plank Thickness min. [mm]
34626	24	**AE 17**	19
34656	24	**AE 22**	24
34686	24	**AE 28**	30
34726	24	**AE 17 CS**	19
34756	24	**AE 22 CS**	24
34786	24	**AE 28 CS**	30



GleitFix® AE

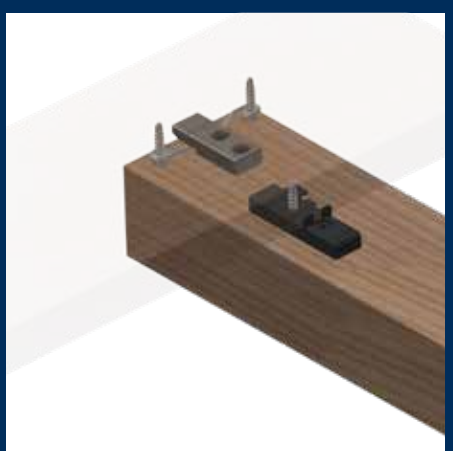

SIHGA® TIP:

GleitFix® AE is also compatible with SenoFix® FT*.
* Available from specialist timber dealers