
TefaFlex® T

SIHGA® Feature	YOUR Benefit
special geometry	minimum contact area of the boards in case of visible screwing, allows bowling up of the planks stress-free
takes up the axial displacement of the TefaFix® T effortlessly	screw breakage due to swelling and shrinkage is thus counteracted
53 mm length	suitable for all plank widths
8.5 mm height	final distance of the plank to the substructure according to the state of technology, optimum ventilation and drainage
HFA inspected in combination with Alu-TeFix® and TefaFix® T	for details please see page 66



SIHGA®		TefaFlex® T		
montagepack		Length	Width	Height
Art. No.	PU	[mm]	[mm]	[mm]
52036	300	53,2	49	8,5

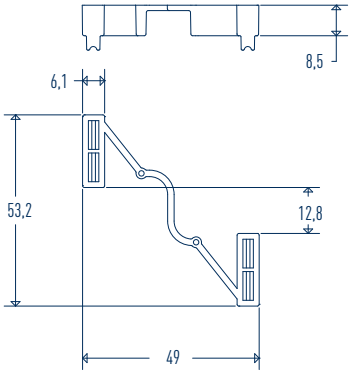

TefaFlex® T made of polypropylene



SIHGA® TIP:

One piece of TefaFlex® T is required per plank joint.

TefaFix® T with TefaFlex® T and Alu-TeFix®



TefaFix® T with GleitFix® GF



TefaFix® T with SenoFix® FT* Alu



* Available from specialist timber dealers