# TefaFlex® F


SIHGA



**TefaFlex® F**
**polyvinyl chloride**

| SIHGA® Feature | YOUR Benefit |
|---|---|
| special geometry | minimum contact area of the profiles in case of visible screwing, allows bowling up of the profiles stress-free |
| act as punctual supports for the facade profiles | ventilation and drainage of the water is guaranteed, especially with vertical installation of the facade profiles |
| jams when inserted into the TefaFix® F | can be inserted into the intended shaft of the TefaFix® F and holds, no complex and costly fixing necessary |
| 40 mm length | suitable for all profile widths |
| 8.5 mm height | finished distance of the profile to the substructure according to the state of the art, optimal ventilation and drainage |

| SIHGA® | | TefaFlex® F | | |
|---|---|---|---|---|
| montagepack | | Length | Width | Height |
| Art. No. | PU | | | [mm] |
| 52126 | 300 | 40 | 20 | 8,5 |

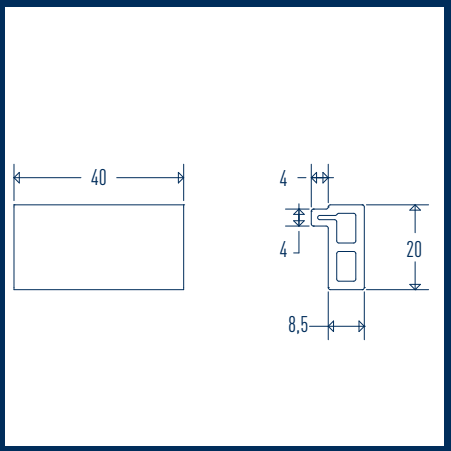




## SIHGA® TIP:

One piece of TefaFlex® F is required per joint.