

Pfalu Aquastop®


SIHGA

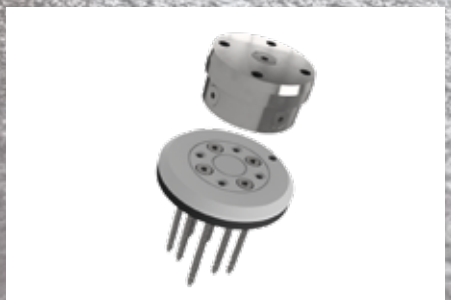

Pfalu Aquastop®
for integration with foil roofs

SIHGA® Feature	YOUR Benefit
fastening system for railing uprights on flat roof waterproofing	quick, simple and safe installation
ideally suited for railings and screening walls	offers extensive stability and bending stiffness
stepless and easily accessible inclination adjustment up to 4° in all directions	straight-lined, flush appearance of posts without complex compensation
pressing surface reinforcement using GoFix® S+	use on wood beams and solid wood ceilings and BSP systems
valve for leak testing	reliable connection and sealing, system can be serviced
combinable with various sealants	fastened to PVC, EPDM and even sheet metal
sealants are clamped-in	later installation in existing waterproofing also possible
including Pfalu®, SIHGAFIX®, GoFix® S+ and all seals	time-saving, practical, precise, all accessories included

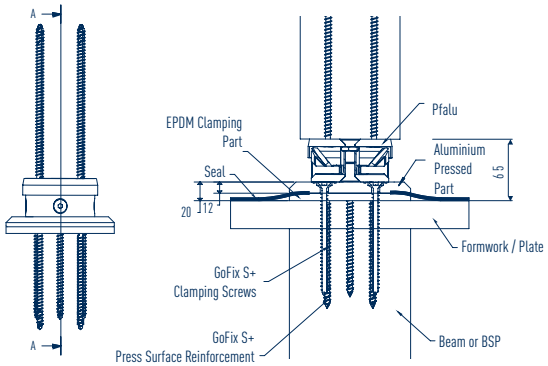



SIHGA® montagepack Art. No.	PU	Dimension Pfalu® d x h	Dimension Aquastop d x h	GoFix® S+ Underground d x L [mm]	GoFix® S+ Pressed Piece d x L [mm]	GoFix® S+ Pfalu® d x L [mm]	Max. Torque [kNm]
43546	5	**90 x 46**	130 x 20	8,0 x 125	8,0 x 155	8 x 195	1,25





SIHGA® TIP:

For waterproofing testing use leak spray and an air pump.