FassadenClip® FCS


SIHGA



FassadenClip® FCS



SIHGA® Feature	YOUR Benefit
patented facade fastening, invisibly screwed, made and developed in Austria	the optically elegant surface is created simply, flexibly and without auxiliary tools
suitable for almost all wood types with profile height 57-95 mm	both rhombus and square-shaped profiles can be professionally fastened
automatic distance to the substructure is 5.5 mm	the facade remains optimally ventilated, timber can dry well
freely selectable reveal width, we recommend 10 mm	the recommended joint width can be installed automatically without further aids
timber remains undamaged on all visible surfaces	timber is screwed from behind, this prevents direct weathering and ensures a durable facade
includes SIHGAFIX®, all fastening screws, Systemstift® and installation instructions	time-saving, practical, precise, complete accessories enclosed
two screw points per FassadenClip® in the facade panel	creates the same stability as when visibly screwed, prevents warping of the timber
quantity calculation per m²	1: substructure distance [m] : (height of facade profile [m] + join [m])

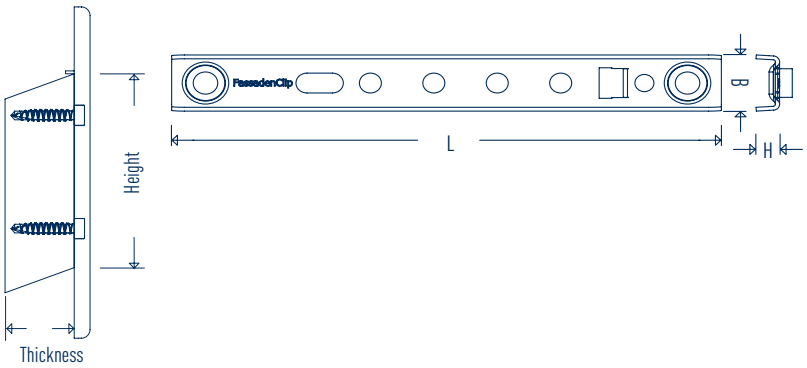

Dimension [mm]
FassadenClip® FCS

L	B	H
115	15	5,5
130	15	5,5
145	15	5,5

SIHGA® montagepack		Dimension FassadenClip® FCS	Dimension of facade profile Height [mm]		Thickness [mm]
Art. No.	PU	Type	min.	max.	min.
32355	300	**115 x 17**	57	68	19
32365	300	**115 x 22**	57	68	24
32375	300	**115 x 28**	57	68	30
32385	300	**130 x 17**	69	80	19
32395	300	**130 x 22**	69	80	24
32405	300	**130 x 28**	69	80	30
32415	300	**145 x 17**	81	95	19
32425	300	**145 x 22**	81	95	24
32435	300	**145 x 28**	81	95	30

L-BohrFix® FB
∅ 4,5 x 29



BohrFix® FB
∅ 4,2 x 17 / 22 /28

