HobaFix® HFM

SIHGA® Feature	YOUR Benefit
for wall connections, corner connections, partition walls and privacy fence elements	one connector for all applications when installing wall elements, precise and accurate
the installation connector for mounting	for rational positioning, saves extensive work time
installation tolerance of 14 mm	the major advantage during installation, on site and in the factory: the high tolerance
elastic pre-tensioning	which is why HobaFix® HFM has a spring effect, a great help during installation
fastened in the installation groove to the wall element, 30 mm wide and 17 mm deep	good view of the connector at all times during installation, important for fast and accurate mounting
made from polyamide	HobaFix® HFM slides easily into the desired position - without abrasion
the static load per pair of connectors is characteristically 8.5 kN	tested value of the enclosed system screws in accordance with ETA approval
includes SIHGAFIX®, all fastening screws, Systemstift®, installation instructions	time-saving, practical, precise, complete accessories enclosed

SIHGA®		Dimension			Chamfer		System Screws
montagepack		HobaFix® HFM			Depth	Width	GoFix® SK
Art. No.	PU	L	B	H	[mm]	[mm]	d1 x L
30306	12*	176	28	32	17	30	6,0 x 70

* corresponds to 6 connections



HobaFix® HFM made from polyamide





Example wall connection


SIHGA® TIP:


We recommend two pairs of HobaFix® HFM per wall joint.

Application HobaFix® HFM

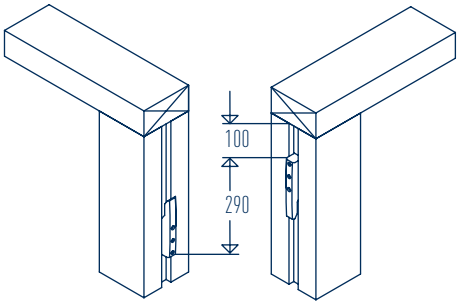


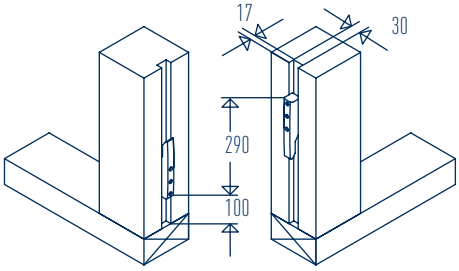

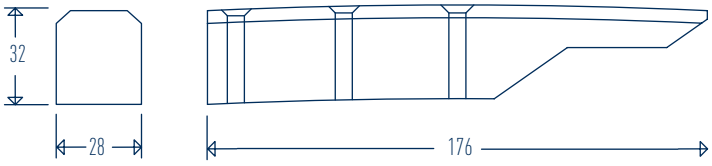

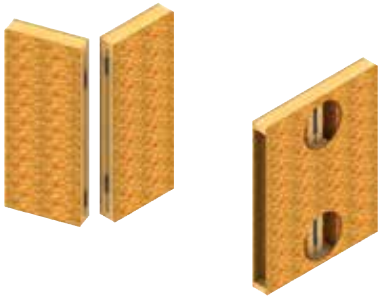

HobaFix® HFM
wall connections

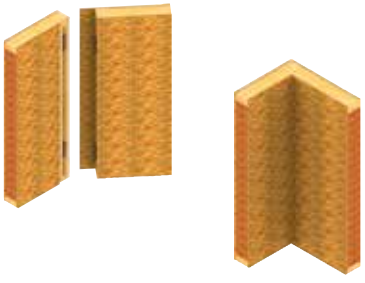

HobaFix® HFM
corner connections