GoFix® 45

SIHGA




GoFix® 45
8,0 mm




GoFix® 45
10,0 mm

SIHGA® Feature	YOUR Benefit
rapid, problem-free installation of the GoFix® 45	fixed 45° inclination for optimal tensile force uptake
ideal in combination with the SIHGA® GoFix® S+ 8.0 and 10.0 mm fully threaded screw or GoFix® SH	pull-through prevented by the large countersunk head seating area
no special production needed with inclined counterbore	saves time and money
provides maximum flexibility	the most varied metal tabs can be used
including installation instructions	enclosed accessories - practical and time-saving

GoFix® 45 ∅ 8,0 mm

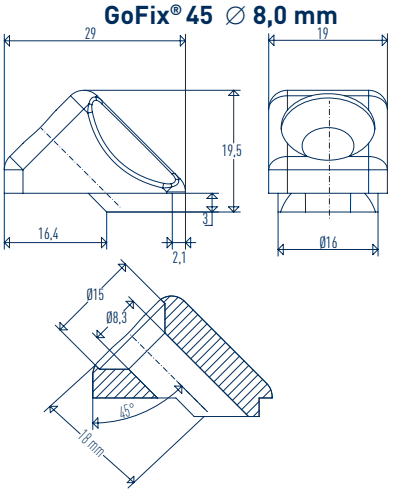

GoFix® 45 ∅ 10,0 mm

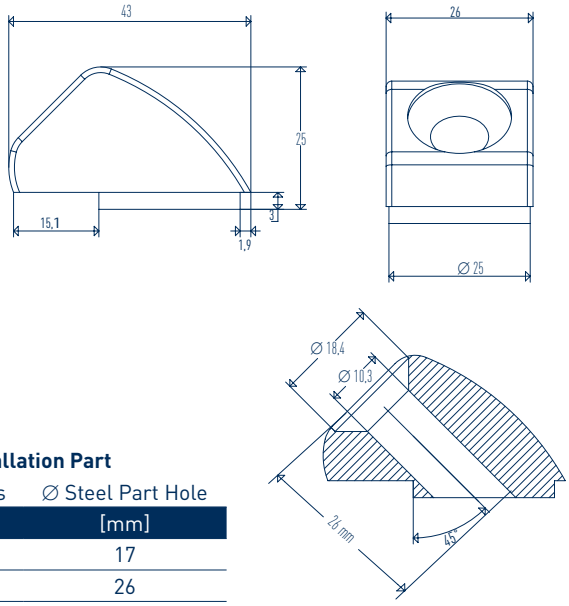

SIHGA® montagepack		Dimension		Installation Part	
		∅ Drill	GoFix® 45	Steel Thickness	∅ Steel Part Hole
Art. No.	PU	[mm]	[mm]	[mm]	[mm]
31582	10	8,0	29 x 19 x 19,5	≤ 5	17
31592	10	10,0	43 x 26 x 25	6 - 10	26





SIHGA® TIP:

For effortless screw-in of GoFix® S+, a tangential-impact screwdriver to spare your wrist joint.