
TerrassenFix® Air

SIHGA





TerrassenFix® Air aluminium

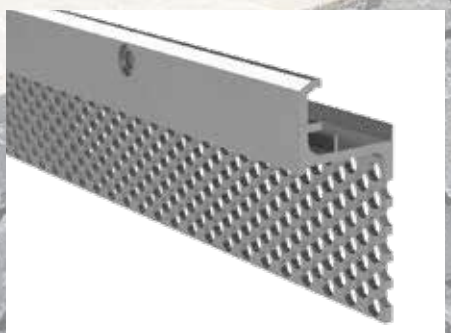

Terrace Edge Revetment

SIHGA® Feature	YOUR Benefit
special geometry	can be used as a ventilation element or substructure for terrace edge revetment
aluminium	workable with common tools and machines
pre-drilled	easy installation using TeFix®
optimum static solution	load transfer of the edge cover via the planks
profile height	or all plank thicknesses from 20 mm
profile interruptions	water drainage and ventilation guaranteed

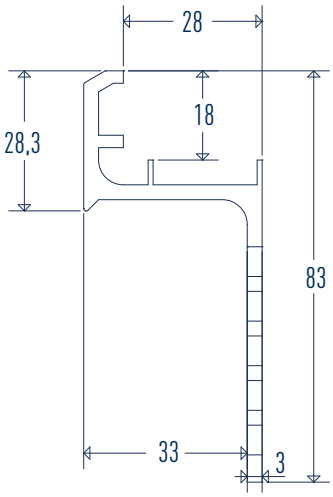

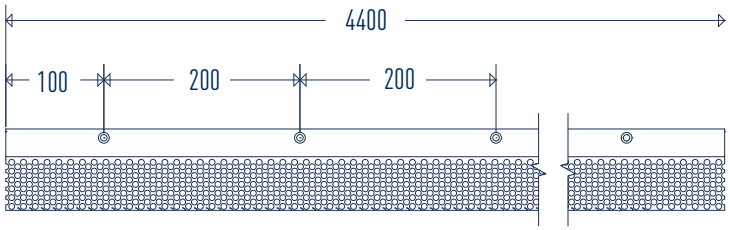

SIHGA®					TerrassenFix® Air*	
Package		Length	Width	Height	Perforation Front Side for TeFix®	Perforation for Ventilation
Art. No.	PU	[mm]	[mm]	[mm]	[mm]	[mm]
52064	5	4400	36	83,0	∅ 5,0	∅ 6,0

* all fixing screws are available separately





SIHGA® TIP:

To fix a wooden panel, we recommend the BohrFix® FB 4.2 x 17/22/28 mm in stainless steel screwed in from the back of the TerrassenFix® Air.