
# TerrassenFix® Clamp III

| SIHGA® Feature | YOUR Benefit |
|---|---|
| clamping width 260 - 780 mm | time-saving, practical, precise for terrace construction, from plank widths of 90 mm or can also be used universally; |
| material thickness of the front section only 4 mm | easy to use with all terrace joints and when working close to walls |
| wide clamp jaws | no pressure points on the plank edge |
| close and open the clamp with one handle or ... | the clamping together of the planks and the opening of the clamps are performed by turning the handle or... |
| ... with additional universal drive, the further development by professionals for professionals | ... with drive TX 40, external hex SW 13, hexagon socket 6 mm for even faster handling |
| easy, quick adjustment and fine adjustment of the clamping width | quick adjustment from the front with a magnetic rod, fine adjustment using a rotating handle |

| SIHGA® montagepack | | Type TerrassenFix® | Clamping Distance [mm] | |
|---|---|---|---|---|
| Art. No. | PU | Type | from | to |
| 35036 | 1 | **Clamp III** | **260** | **780** |



TerrassenFix®
Clamp III

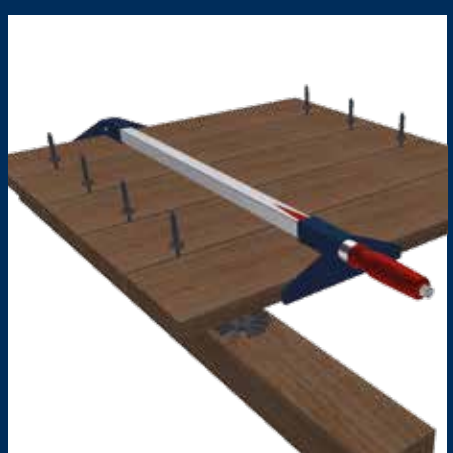

## SIHGA® TIP:

The TerrassenFix® Clamp III is the ideal laying tool for floorboard coverings and the precondition for the assemby of SenoFix® II SX*.

* Available from specialist timber dealers